



Made to suit your needs

The TM60/3 and TM60/4 console transmitters with joysticks from the TM60 remote control range have been designed with overhead and tower crane applications in mind.

The joysticks, which can be up to 6 notches or stepless, are dual-axis which makes it possible to carry out several functions simultaneously. The joysticks are contact-free which makes them very reliable and guarantees a long life.

Wide ranges of configurations are possible thanks to the flexibility of the design. This means that the equipment can be customized for different applications. A variety of options are available, such as range limitation, feed back from the receiver, or analog outputs which can be adjusted from the transmitter. The scope of these options makes it possible for the equipment to be used to meet the needs of almost any application.

- 1 Machine identifier.
- 2 LED.
- 3 Multi-step or stepless two-axis joystick.
- 4 Auxiliary commands.
- 5 Stop pushbutton.
- 6 Contact key.
- 7 Start pushbutton.
- 8 Battery.




Receiver



Charger and batteries



Belt and strap

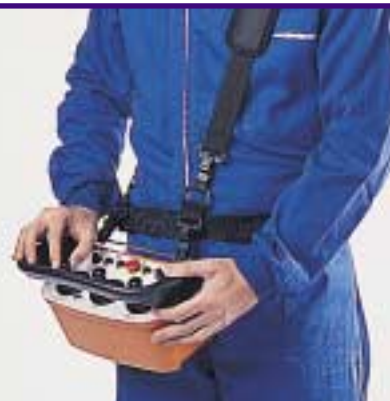

Technical Specifications

Transmitter	T60/3	T60/4	Receiver	R60/9	R60/18	R60/26	R60/38
Frequency	405 to 475 MHz		Power supply	48, 115, 230 Vac ± 10%; 50/60 Hz			
RF power	10 mW		Dimensions (mm)	340x260x100		340x260x125	
Protection	IP65		Protection	IP55			
Autonomy	approx. 8h		Relays	230 Vac/8A			
Temperature range	-20 to + 65°C		Output commands	9	18	26	38
Joysticks	2	3	Other outputs	Start + STOP + Safety			
Auxiliary commands	4	6					
Weight incl. battery (Kg)	1.8	2.1					
Batteries	BT12		Battery charger	CB60			
Capacity	1200 mAh, 7.2 V		Power supply	230Vac ± 10%; 50 Hz			
Charge temperature	5 to 35°C			Optional 115 Vac, 60 Hz; 24 Vdc			

HEAD OFFICE

Ikusi - Angel Iglesias, S.A.
Polígono 27 N° 30 (Martutene)
Apartado 1320
20080 San Sebastián
Tel.: +34 943 44 88 00
Fax: +34 943 44 88 16
E-Mail: tlc@ikusi.es
www.ikusi.com