




## The perfect solution for concrete pump trucks

The TM60/5 and TM60/6 are specially designed for use with concrete pump trucks.

With this remote-controlled equipment, the physical link between the controls and the truck is removed, thus eliminating the risk of electrocution arising from the machinery accidentally coming in contact with overhead electricity lines, often a source of very serious injuries.

In addition, the awkward and time-consuming task of unrolling and laying out of cables before starting a job and collecting and rolling up of the cable on completion is no longer necessary. No additional workers are needed for signaling purposes as the operator is now free to choose a safe vantage point from which to work.

- 1 Machine identifier.
- 2 LED.
- 3 Single step two-axis joystick.
- 4 Auxiliary commands.
- 5 Stop pushbutton.
- 6 Contact key.
- 7 Start pushbutton.
- 8 Battery.

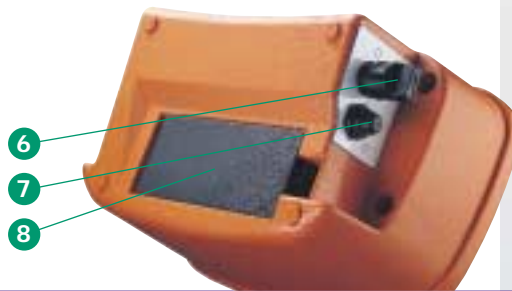

Receiver	Charger and batteries	Belt and strap
		

### Technical Specifications

Transmitter	T60/5	T60/6	Receiver	R60/18	R60/26
Frequency	405 to 475 MHz		Power supply	24 Vdc; optional 12 Vdc	
RF power	10 mW		Dimensions (mm)	340x260x100	340x260x125
Protection	IP65		Protection	IP55	
Autonomy	approx. 12h		Relays	8A	
Temperature range	-20 to + 65°C		Output commands	18	26
Joysticks	3	4	Other outputs	Start + STOP + Safety	
Auxiliary commands	4	6			
Weight incl. battery (Kg)	1.8	2.1			
<b>Batteries</b>	<b>BT12</b>		<b>Battery charger</b>	<b>CB50</b>	
Capacity	1200 mAh, 7.2 V		Power supply	24 Vdc; optional 12 Vdc	
Charge temperature	5 to 35°C				

#### HEAD OFFICE

Ikusi - Angel Iglesias, S.A.  
Polígono 27 N° 30 (Martutene)  
Apartado 1320  
20080 San Sebastián  
Tel.: +34 943 44 88 00  
Fax: +34 943 44 88 16  
E-Mail: [tlc@ikusi.es](mailto:tlc@ikusi.es)  
[www.ikusi.com](http://www.ikusi.com)